

ADDENDUM NUMBER 1

**TRI CITIES AIRPORT INDUSTRIAL PARK BPA LIGHTING REPLACEMENT
PROJECT NO. E10-07
January 29, 2010**

Bids Due: 2:00 PM, February 8, 2010

The following addendum is hereby issued and made a part of the specifications for the Tri Cities Airport Industrial Park BPA Lighting Replacement project.

- 1) In the Specifications Section under "Division 1 Description of Work", delete in its entirety the first paragraph and replace with the following "The project involves removal of 88 each existing fixtures and installation of 74 each T5 fluorescent fixtures at building 69, 85 and 102 and 14 each T8 fixtures in building 201 at Bonneville Power Operations buildings. New fixtures and bulbs will be furnished by others. Plans are attached as Figures 1 through 3. General demolition includes, but is not limited to, removal of existing high bay metal halide porcelain fixtures, flex chords to junction boxes associated with existing fixtures and any necessary items in conjunction with existing fixtures for the installation of the new fixtures provided by others. In addition to general demolition, building specific construction requirements are listed below:"
- 2) In specifications Section under "Division 1 Description of Work", delete in its entirety the second paragraph and replace with the following: "Contractor shall install 74 each six tube T5 and 14 each T8 chain mounted fluorescent fixtures as provided by Bonneville Power Association. These fixtures are manufactured by Texas Fluorescent T5-T.F. # HBT5.654.GE-MV.DFA.CS10.HC101.OSFHU {LEVITON} T8- T.F # C2328.GE-MV. These fixtures have on board occupancy sensors. All bulbs (provided by BPA) will also be installed under this contract. The fixtures will come with a ten foot chord with exposed wires for installation of twist lock ends. Contractor shall provide and install all necessary hardware to hang fixtures in general location of existing fixtures."
- 3) In the Specifications Section under "Division 1 Description of Work", add the following paragraph to the end of the section: "Contractor shall remove all existing high bay metal halide fixtures as shown being replaced and store them in a designated area for the Port of Pasco Maintenance crew to retrieve for future use by the Port".
- 4) Add Figure 3- Building 69 to Figures section of bid documents.

TCA Industrial Park BPA Lighting Replacement

January 29, 2010


Page 2

NOTICE is hereby given that this addendum must be signed and enclosed with the sealed bid for the Tri Cities Airport Industrial Park BPA Lighting Replacement as evidence that the bidder has familiarized himself with all changes incorporated herein.

Name of Bidder Company


Signature

Printed Name



Tracy Friesz

Facilities Engineer

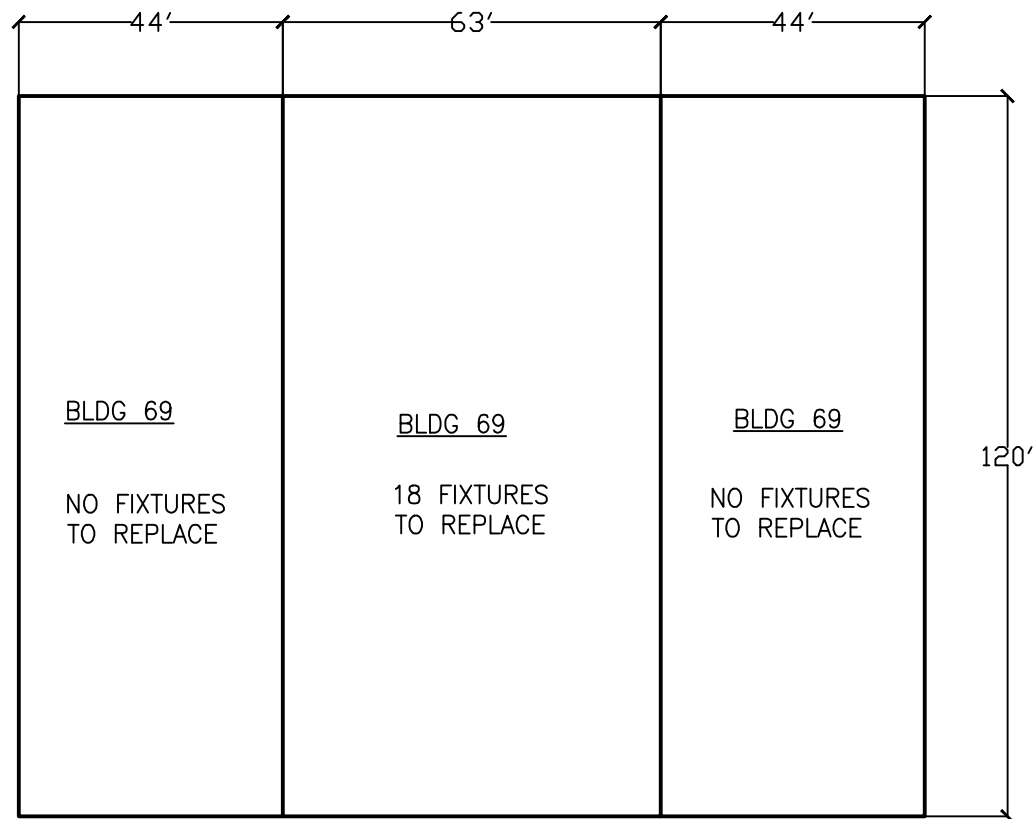

A Plan view
Scale: 1/32"=1'-0"



BLDG 69 TYPICAL LAYOUT
NORTH




BLDG 69 TYPICAL EXISTING
FIXTURE CONNECTION



BLDG 69 TYPICAL LAYOUT
SOUTH



BLDG 69 TYPICAL EXISTING
FIXTURE CONNECTION

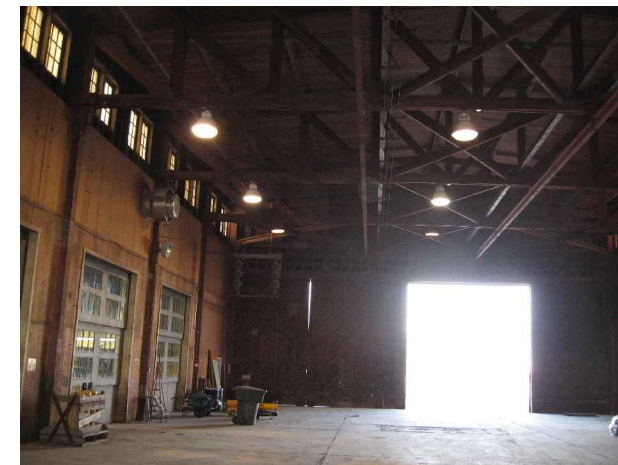

BLDG 69 TYPICAL LAYOUT